

3-axle mega sliding tarpaulin platform semitrailer



Product benefits

- Low corrosion, high-quality aluminium body components, tested according to EN 12642
- Perforated external frame (starting approx. 3,000 mm from front wall) with approx. 100 mm hole spacing, 40/25 mm slot according to DIN EN 12640 and 22 pairs of recessed 2.5 t lashing points
- Aluminium tarpaulin mounting strips on both sides of external frame
- Reinforced aluminium hollow profile front wall with integrated equipment bracket
- Bolted portal at rear with aluminium corner posts and fully opening double door in profile design
- Double floor consisting of subfloor with integrated aluminium omega profiles beneath resin-coated wear floor (stacker axle load: 7 t)
- Manually operated hydraulic lifting roof, 400 mm elevation for rapid loading and unloading
- Installation of axles from well-known manufacturers such as SAF or BPW
- OPTIONAL: Coil recess = useful length approx. 7,400 mm - design according to VDI 2700 for coil diameters between 900 and 2,100 mm
- OPTIONAL: Conical tarpaulin adjustment = adaptation of front internal height
- OPTIONAL: Certified according to DC Directive 9.5, certified for beverages and barrel goods
- OPTIONAL: Extendible portal columns (each by approx. 400 mm) for easier loading and unloading

Product details

TYPE DESIGNATION

3-AXLE LIGHTWEIGHT LARGE-SCALE SLIDING TARPAULIN PLATFORM
SEMITRAILER RH40
For transporting lattice box pallets according to DIN 15155

WEIGHTS

Gross train weight (perm.): 40 t
Gross weight (techn.): 39 t
Axle assembly load (techn.): 27 t
Fifth-wheel load (techn.): 12 t
Tare weight: approx. 6.8 t

DIMENSIONS

Internal platform length: approx. 13,620 mm
Internal platform width: approx. 2,480 mm
Total width: 2,550 mm
Load space internal height: approx. 3,010 mm
Lateral loading height below guide rail: approx. 2,855 mm
Internal width between guide rails: approx. 2,490 mm
Portal loading height: approx. 2,910 mm
Portal loading width: approx. 2,480 mm
Loading height: approx. 40 mm over fifth-wheel height

FRAME

Lightweight welded steel frame construction in special low design
Frame with wheel housings over wheels
Replaceable 2" kingpin (EC installation dimension, width across corners: 2,040 mm)
Perforated external frame (starting approx. 3,000 mm from front wall) with approx. 100 mm hole spacing, 40/25 mm slot according to DIN EN 12640 and 22 pairs of recessed 2.5 t lashing points

CHASSIS

Air suspension with lifting and lowering device, approx. 250 mm
(approx. +180/-70 mm)

Automatic adjustment of driving level from 15 km/h

air suspension unit with low-maintenance 370 mm disc brake axles
3 x 9 t rigid, wheelbase 2 x 1,310 mm

Tyres :

6 x 435/50 R 19.5 160J, Goodyear Fuelmax T

6 steel wheel rims 14.00 x 19.5, 10-hole, with rim offset, silver

SUPPORT FIXTURES

Mechan. 2 x 12 t special support jacks, single-sided operation and thrust compensation,
manufacturer as per factory specifications

BRAKE SYSTEM

Brake system according to EC Directive 71/320 or EC E R13

Two-line brake

EBS - electronic brake system

Wabco 2S2M = one axle sensed

RSS - stability program

Spring-loaded parking brake on 2 axles

Aluminium air tank

FLOOR

Up to approx. 4,300 mm length at front made from 30 mm resin-coated plywood, followed by 30 mm spruce planks to frame end

Aluminium omega profiles in subfloor

Secondary floor made from resin-coated birch plywood, 9 mm, flush with external frame

SIDE WALLS/SLIDING TARPULIN

Fixed aluminium hollow profile front wall, 2,550 mm, with 2 centre supports,

2 lashing rings inside for load securing

Closed with tarpaulin over front wall, in same colour as side tarpaulin

Front wall reinforced inside with galvanised steel plate, approx. 650 mm high

Plastic sliding tarpaulins on both sides with load certification according to Code XL; welded horizontal and vertical strap reinforcements incl. turnbuckles as well as front and rear bolt locks,

openable on all 4 corners, with ratchet tensioner at rear,
tarpaulin sealed against external frame,
tarpaulin manufacturer as per factory specifications, tarpaulin colour according to availability
Aramid-reinforced plastic roof tarpaulin, translucent

Bolted portal at rear with aluminium corner posts, upper crossbeam with forward-sliding cover,
incl. fully opening double door in profile design covering entire load space height, each leaf
equipped with 2 internal espagnolettes

POSTS/COVER

2 fixed aluminium corner posts at front, bolted, protruding from sides
3 centre posts on left in direction of travel, movable across entire length, for lifting roof incl.
Expander lifting aid
3 centre posts on right in direction of travel, movable across entire length, for lifting roof incl.
Expander lifting aid
3 additional post pockets on both sides
4 rows of slat pockets, 1st pocket row at bottom 460 mm, spacing approx. 160/600/600 mm, with
4 rows of aluminium pointed slats 100/25 mm

Manually operated hydraulic lifting roof, 400 mm elevation, with lever operation on corner posts,
for loading and unloading (portal doors must be opened)

Versus sliding cover with plastic brackets, forward-sliding with automatic elevation = pushed
together in loading area, with vertical and horizontal guide rollers = smooth operation
Aluminium pallet guide rail profile on both sides for sliding tarpaulins and posts, design height 195
mm
Control rod for sliding tarpaulin (bracket on interior side protection)

ELECTRICAL EQUIPMENT

24 V lighting system according to EC Directive 76/756/E WG
2 seven-chamber tail lights in underride protection
LED side marker lights
2 clearance lamps
2 contour lights on underride protection
2 x 7-pin and 1 x 15-pin socket

PAINTWORK

Blasted with steel granulate, treated with zinc dust primer and spray painted with 2-component

acrylic paints for commercial vehicles (standard RAL or truck colour)

Plastic and hot-dip galvanised parts unpainted,
powder-coated attachments/installation parts black

Reflective contour marking strips across entire length of sides and all-round contour marking at rear (white on sides and red at rear by default), according to ECE 48

ACCESSORIES

Rear markings as per ECE standards (horizontal on rear doors/rear wall)

ATTACHMENTS

Rear crash guard with portal post protection and lower post reinforcement

Wheel chock(s) as per regulations

1 x retractable step unit at rear right

12 short plastic mudguards with spray protection according to Austrian regulations

Aluminium tarpaulin mounting strips bolted on both sides of external frame

Aluminium underride protection, coated white

Side impact protection made from aluminium profiles as per regulations, coated black

1 spare wheel bracket for spare semitrailer wheel (on right after axle)

1 plastic toolbox, lockable, unpainted , on left after axle

Product impressions




Manually operated hydraulic lifting roof, 400 mm elevation for rapid loading and unloading



OPTIONAL: Coil recess = useful length approx. 7,400 mm - design according to VDI 2700 for coil diameters between 900 and 2,100 mm



Reinforced aluminium hollow profile front wall with integrated equipment bracket

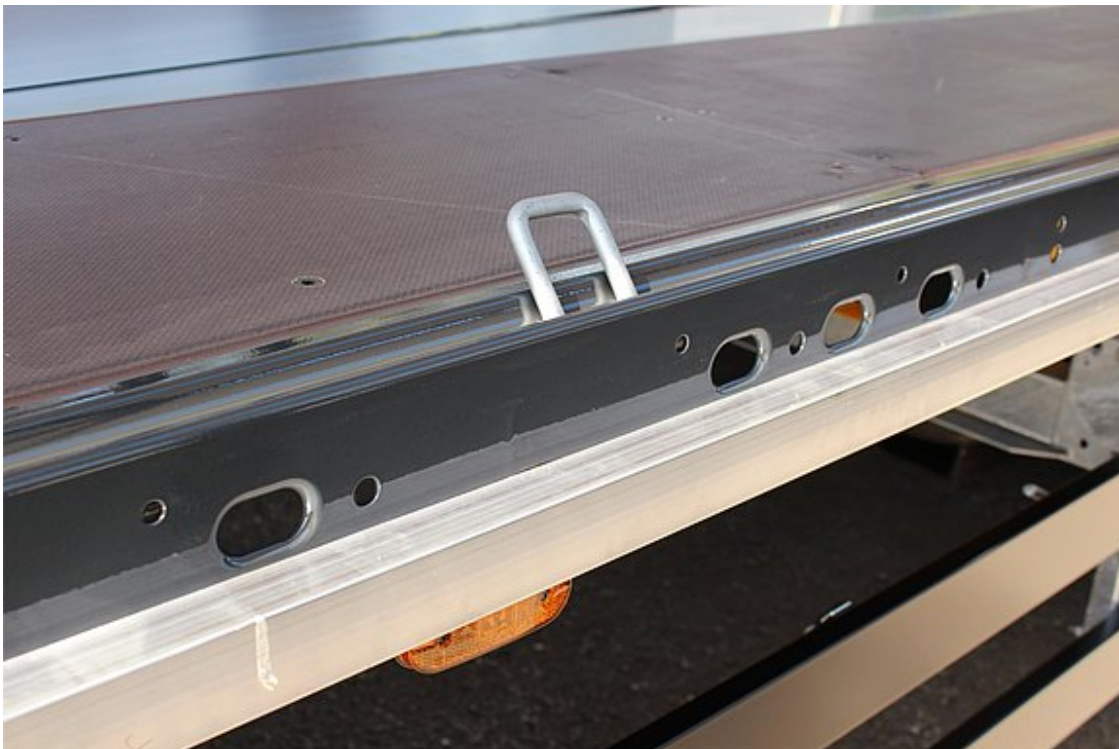

Perforated external frame (starting approx. 3,000 mm from front wall) with approx. 100 mm hole spacing, 40/25 mm slot according to DIN EN 12640 and 22 pairs of recessed 2.5 t lashing points



Bolted portal at rear with aluminium corner posts and fully opening double door in profile design



Low corrosion, high-quality aluminium body components, tested according to EN 12642



Double floor consisting of subfloor with integrated aluminium omega profiles beneath resin-coated wear floor (stacker axle load: 7 t)



OPTIONAL: Extendible portal columns (each by approx. 400 mm) for easier loading and unloading

